

Repeater Power Supply and Trip Amplifiers DIN-Rail Model D1054S

Characteristics:

General Description:

The single channel DIN-Rail Repeater Power Supply and Trip Amplifier D1054S, provides a fully floating dc supply for energizing conventional 2-wire 4-20 mA Transmitter, or separately powered 3, 4 wire 4-20, 0-20 mA Transmitter located in Hazardous Area, and repeats the current in floating circuit to drive a Safe Area load. Output signal can be direct or reverse. The circuit allows bi-directional communication signals, for Smart Transmitters. Two independent Alarm Trip Amplifiers are also provided. Each Alarm energizes, or de-energizes, an SPST Relay for High, Low, Low-startup or burnout Alarm functions. The two Alarm Relays Trip points are settable over the entire input signal range.

Function:

1 channel I.S. analog input for 2 wire loop powered or separately powered Smart Transmitters, provides 3 port isolation (input/output/supply) and current (source mode) or voltage output signal. In addition it provides two SPST Relay Alarm contacts with adjustable Alarm Trip Point.

Signalling LEDs:

Power supply indication (green), Alarm A / B (red), burnout condition (red).

Field Configurability:

Totally Software configurable, no jumpers or switches, mA or V output signal, linear or reverse, Alarm Trip Point, High, Low, Low-startup or burnout Alarm mode, NE/ND relay operation, Hysteresis, Delay time, by a GM Pocket Portable Configurator PPC1090, powered by the unit or via RS-232 Serial line with PPC1092 Configurator. To operate PPC1090 refer to instruction manual.


Smart Communication Frequency Band:

0.5 to 40 KHz within 3 dB (Hart and higher frequency protocols), only with mA direct current output.

EMC:

Fully compliant with CE marking applicable requirements.

Front Panel and Features:

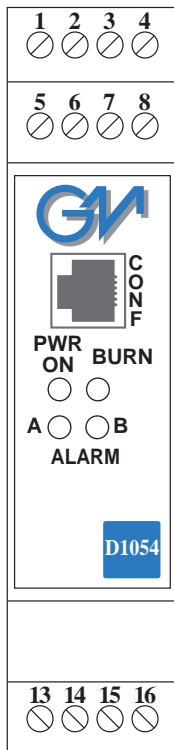

- 4-20 or 0-20 mA loop or externally powered Input Signal.
- 0/4-20 mA, 0/1-5 V, 0/2-10 V Output Signal Linear or Reverse.
- Wide Band Smart Communication, Hart compatible.
- Input and Output short circuit proof.
- Output for burnout detection.
- Field software programmability.
- High Accuracy, μ P controlled A/D converter.
- Three port isolation, Input/Output/Supply.
- EMC Compatibility to EN61000-6-2, EN61000-6-4.
- ATEX Certification.
- High Reliability, SMD components.
- High Density, 1channel 2 Trips per unit.
- Simplified installation using standard DIN Rail with plug-in terminal blocks.
- 250 Vrms (Um) max. voltage applied to the instruments associated with barrier.

Technical Data:

Supply: 12-24 V nom (10 to 30 V) reverse polarity protected ripple within voltage limits ≤ 5 Vpp.

Current consumption @ 24 V: 100 mA with 20 mA input/output and relays energized.

Current consumption @ 12 V: 220 mA with 20 mA input/output and relays energized.

Max. power consumption: 3.40 W with 30 V supply voltage, short circuit overload condition, relays energized and PPC1090 connected.

Isolation (Test Voltage): I.S. In/Out 1.5 KV; I.S. In/Supply 1.5 KV; Analog Out/Alarm Out 1500 V; Analog Out/Supply 500 V. Alarm Out/Alarm Out 1500 V; Alarm Out/Supply 1500 V.

Input: 0/4 to 20 mA separately powered input (voltage drop ≤ 1 V) or 4 to 20 mA (2 wire Tx current limited at ≈ 23 mA).

Integration Time: 100 ms.

Resolution/Visualization: 1 μ A on current input.

Input range: 0 to +22 mA on current input reading.

Transmitter line voltage: ≥ 15.0 V at 20 mA with max. 20 mVrms ripple on 0.5 to 40 KHz frequency band.

Burnout: enabled or disabled. Analog output can be programmed to detect burnout condition with downscale or highsacle forcing. Alarm can be programmed to detect burnout condition.

Burnout range: low and high separated trip point value programmable between -5 to +25 mA on current input.

Output: 0/4 to 20 mA, on max. 600 Ω load source mode, current limited at 22 mA or 0/1 to 5 V or 0/2 to 10 V signal, limited at 11 V.

Resolution: 1 μ A current output or 1 mV voltage output.

Transfer characteristic: linear or reverse.

Response time: 100 ms (10 to 90 % step change).

Output ripple: ≤ 20 mVrms on 250 Ω communication load on 0.5 to 40 KHz band.

Frequency response: 0.5 to 40 KHz bidirectional within 3 dB (Hart and higher frequency protocols) only with mA direct current output.

Alarm: Trip Point range: within rated limits of sensor (see input visualization parameters for step resolution).

ON-OFF Delay time: 0 to 1000 s, 100 ms step, separate setting.

Hysteresis: 0 to 5 mA or 0 to 5 V.

(see input visualization parameters for step resolution).

Output: Voltage free 1 + 1 SPST relay contact.

Contact rating: 2 A, 250 V, 100 VA or 2 A, 250 V, 80 W (resistive load).

Performance:

Ref. Conditions 24 V supply, 250 Ω load, 23 ± 1 $^{\circ}$ C ambient temp.

Input: Calibration and linearity accuracy: $\leq \pm 20$ μ A on current input.

Temperature influence: $\leq \pm 1$ μ A of input for a 1 $^{\circ}$ C change.

Analog Output: Calibration accuracy: $\leq \pm 0.1$ % of full scale.

Linearity error: $\leq \pm 0.05$ % of full scale.

Supply voltage influence: $\leq \pm 0.05$ % of full scale for a min to max supply voltage change.

Load influence: $\leq \pm 0.05$ % of full scale for a 0 to 100 % load resistance change.

Temperature influence: $\leq \pm 0.01$ % on zero and span for a 1 $^{\circ}$ C change.

Compatibility:

CE CE mark compliant, conforms to 94/9/EC Atex Directive and to 89/336/CEE EMC Directive.

Environmental conditions: Operating: Temperature limits -20 to + 60 $^{\circ}$ C, relative humidity max 90 % non condensing, up to 35 $^{\circ}$ C.

Storage: Temperature limits - 40 to + 80 $^{\circ}$ C.

Safety Description:

Ex II (1) G D [EEx ia] IIC or I (M2) [EEx ia] I associated electrical apparatus. $U_o/V_o c = 26.7$ V, $I_o/I_s c = 91$ mA, $P_o/P_o = 611$ mW at terminals 14-15. $U_o/V_o c = 1.1$ V, $I_o/I_s c = 56$ mA, $P_o/P_o = 16$ mW at terminals 15-16 (non energy storing apparatus connection). $U_i/V_{max} = 30$ V, $I_i/I_{max} = 182$ mA at terminals 15-16. $U_m = 250$ Vrms, -20 $^{\circ}$ C $\leq T_a \leq 60$ $^{\circ}$ C.

Approvals: DNV-2004-OSL-ATEX-0199 conforms to EN50014, EN50020.

Mounting: T35 DIN Rail according to EN50022.

Weight: about 180 g.

Connection: By polarized plug-in disconnect screw terminal blocks to accommodate terminations up to 2.5 mm².

Location: Safe Area.

Protection class: IP 20.


Dimensions: Width 22.5 mm, Depth 99 mm, Height 114.5 mm.

Parameters Table:

Safety Description	Maximum External Parameters			
	Group Cenelec	Co/Ca (μF)	Lo/La (mH)	L/R / La/Ra (μH/Ω)
Terminals 14-15				
Uo/Voc = 26.7 V	II C	0.035	4.3	57.8
Io/Isc = 91 mA	II B	0.720	17.2	231.2
Po/Po = 611 mW	II A	2.390	34.5	462.4
Terminals 15-16	Non energy storing apparatus connection			
Uo/Voc = 1.1 V	II C			
Io/Isc = 56 mA	II B			
Po/Po = 16 mW	II A			



Friendly Configuration with PC and PPC1092 Adapter

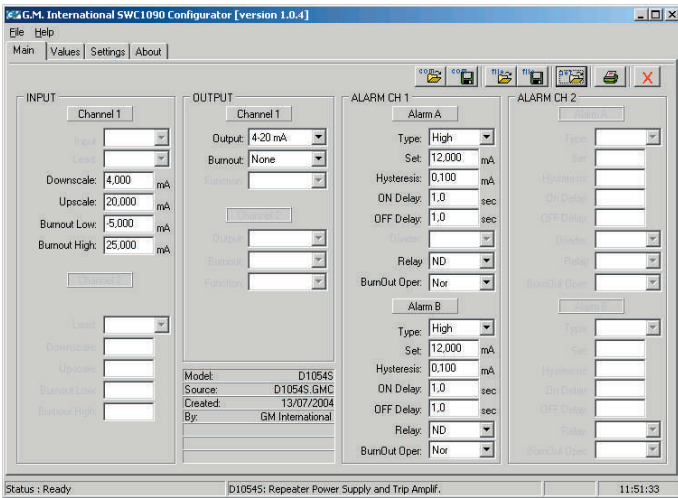

Configuration software available for download on our web site free of charge.

Ordering Information:

Model: D1054S
Power Bus enclosure /B

Input ranges, output types, output range, alarm set point, conditions High/Low/ Low-startup, burnout, hysteresis, delay, relay NE/ND are programmable by the GM Pocket Portable Configurator type PPC1090 or via RS-232 Serial line with PPC1092 Configurator. If the above information are provided with the Purchasing Order, the unit will be configured accordingly, otherwise the unit will be supplied, by default, with the following parameters: Input Type: 4-20 mA - Output Type: 4-20 mA - Set: 50% - Alarm mode: High - Relay: ND Hysteresis: 0.1 mA - Alarm Delay: 1 s. The plate will record the unit type, serial number, function diagram and terminal block layout for connections.

Function Diagram:

