

Compact Pressure Switches X1T (Piston)

Technical Data

Repeatability	: ± 1% typical
Switching Frequency	: max. 60/min
Max. Temperature	: -30 °C to +80 °C
Pressure Connection	: G 1/4 female or Flange connection
Electrical Connection	: Plug connector DIN 43650
Electrical Ratings and Hysteresis	: See chart
Protection Class	: IP65
Housing	: Compact housing made of Aluminum
Wetted Parts	: NBR and PTFE Stainless steel and roller bearing steel
Intrinsically Safe	: The switches are designed for intrinsically safe applications. Please add 'Exi' to your ordering details when placing an order. To comply with the intrinsically safe approval following max. ratings must not be exceeded: U _{max} = 28 V, I _{max} = 50 mA
Set Point Adjustment	: Turn the adjustment screw clockwise to increase the set point.
Weight (appr.)	: 0,4 kg

05 / 03 KDM-ENG 03 / 2

Barksdale Mechanical Pressure Switches



Adjustable Ranges


Pressure Range Code	Adjustable Range (bar) (Increasing Pressure)	Proof Press. (short term) in bar	Max. Operating Pressure in bar	Max. Hysteresis of Switch Types in bar (End of Range)
X1T-...-10	15...100	600	400	11
X1T-...-25	30...250	600	400	16
X1T-...-40	30...400	600	400	24

Diagrams of hysteresis on request.

Subject to technical changes.

Compact Pressure Switches X1T (Piston)

Dimensions (in mm)

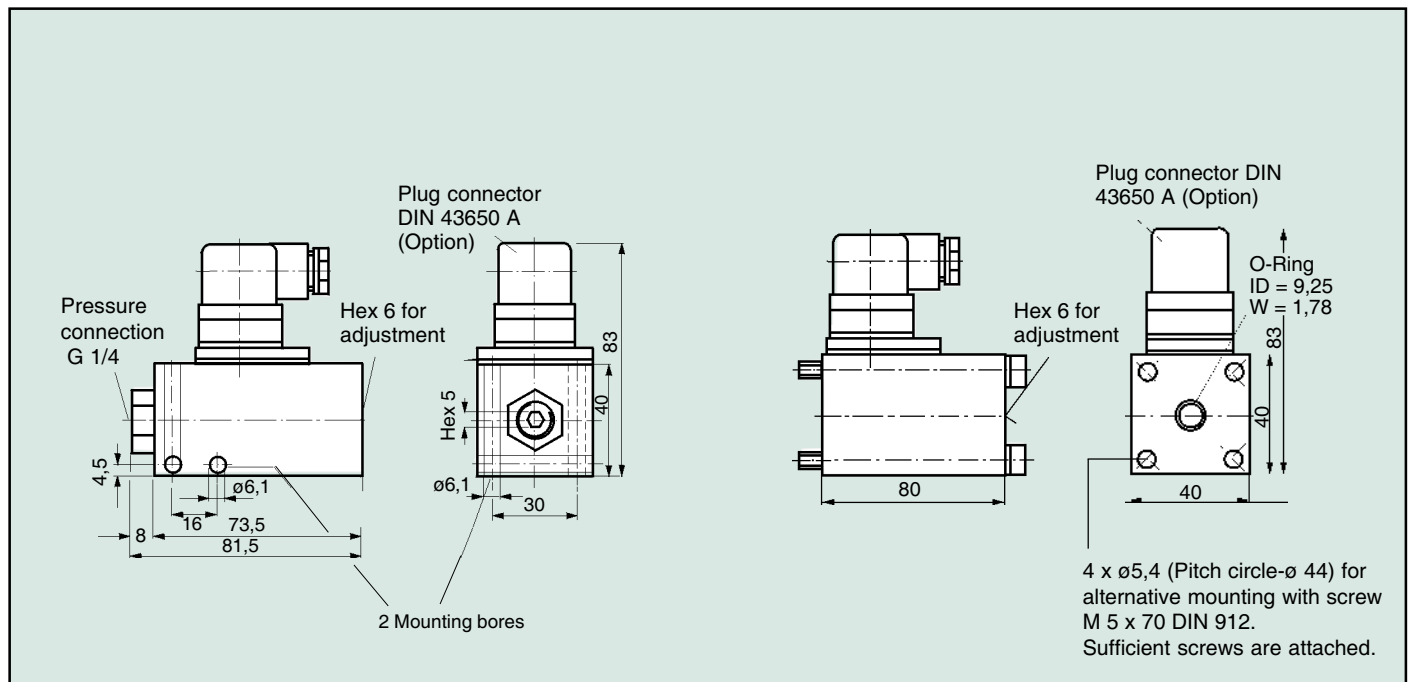

Electrical Ratings

Silver contacts	Inductive load	Resistive load	Gold-plated contacts
30 V =	3,0 A	10,0 A	U _{max} 30 V =
250 V =	0,03 A	0,25 A	I _{max} 400 mA
250 V ~	5,0 A	10,0 A	(U · I) _{max} 0,12 VA

Order number example

Type	Pressure Conn.	Microswitch	Adjustable Range	Option
X1T	02	10	40	EXI

Your order number

Type	Pressure Conn.	Microswitch	Adjustable Range	Option
X1T				

Pressure Connection	Microswitch	Adjustable Range	Options
(40) Flange acc. to C-Top TK44	(00) Silver contact	(10) 15...100 bar	(EXI) for EXI applications
(41) G1/4 F	(02) Gold-plated contact	(25) 30...250 bar	
		(40) 30...400 bar	



TR Automatyka Sp. z o.o.
 ul. Lechicka 14
 02-156 Warszawa
 tel. +48 (22) 686 10 16, fax. +48 (22) 846 50 37
 NIP: 522-27-58-993
 http://www.trautomatyka.pl
 e-mail: biuro@trautomatyka.pl